
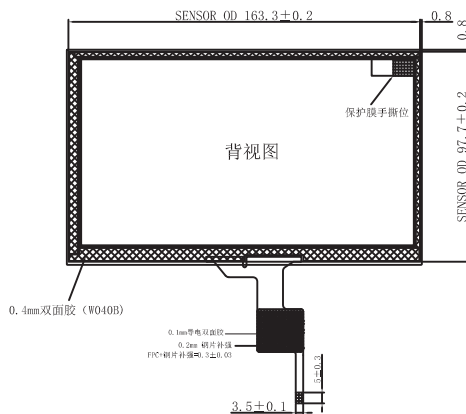
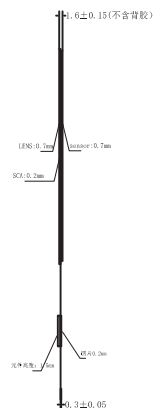


| NO. | 定义 | NO. | 定义 |
|-----|---------|-----|--------|
| 1 | VCOM | 21 | EXL30+ |
| 2 | VDD | 22 | GND |
| 3 | VDD | 23 | NC |
| 4 | NC | 24 | NC |
| 5 | RESET | 25 | GND |
| 6 | STBVB | 26 | NC |
| 7 | GND | 27 | DIM0 |
| 8 | EXIN0- | 28 | SELB |
| 9 | EXIN0+ | 29 | AVDD |
| 10 | GND | 30 | GND |
| 11 | EXIN1- | 31 | LED- |
| 12 | EXIN1+ | 32 | LED- |
| 13 | GND | 33 | L/R |
| 14 | EXIN2- | 34 | L/D |
| 15 | EXIN2+ | 35 | VGL |
| 16 | GND | 36 | GND |
| 17 | EXCLIN- | 37 | GND |
| 18 | EXCLIN+ | 38 | VGH |
| 19 | GND | 39 | LED+ |
| 20 | EXIN3- | 40 | LED+ |

| Cover PIN DEFIN | |
|-----------------|------------|
| PIN | Assignment |
| 1 | GND |
| 2 | VDD |
| 3 | RESET |
| 4 | SCL |
| 5 | SDA |
| 6 | INT |

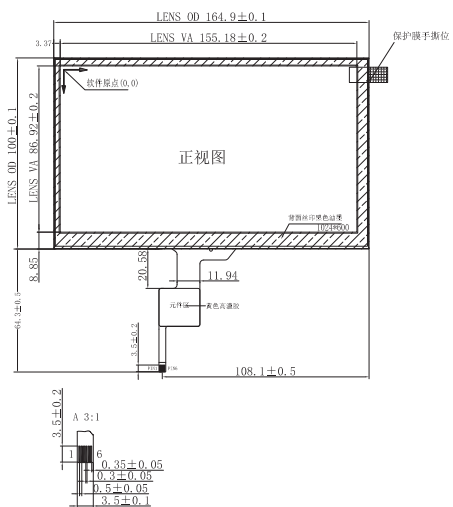

7" TFT Display
 400cd/m²
 1024xRGBx600
 164.9(W)100(H)7.45(D)mm
 Opt. Temp. Range: -20°C +70°C
 View Angle: 80/80/60/70 6:00 O'clock
 RoHS Compliant
 LVDS Capacitive Touch GT911

YLT070GHL40KE-H5-A00