


2.60±0.20(Outline)

(4.60±0.2)

双面胶 T=0.05mm

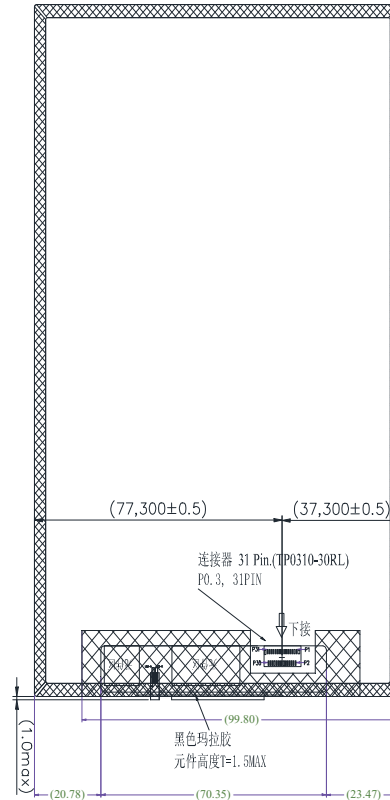

PIN脚	逻辑
PIN1	VDD(3.3V)
PIN2	VDD(3.3V)
PIN3	ID
PIN4	VCC1(1.8V)
PIN5	VCC1(1.8V)
PIN6	RST
PIN7	VPP
PIN8	NC
PIN9	DEP
PIN10	NC
PIN11	DEN
PIN12	GND
PIN13	GND
PIN14	DIP
PIN15	ELAP
PIN16	DIN
PIN17	ELAN
PIN18	GND
PIN19	GND
PIN20	DOP
PIN21	DSP
PIN22	DON
PIN23	DSN
PIN24	GND
PIN25	NC
PIN26	FB1
PIN27	FB2
PIN28	FB3
PIN29	NC
PIN30	VLED
PIN31	VLED

8" TFT Display  
 460cd/m<sup>2</sup>  
 800xRGBx1280  
 184.1(W)114.6(H)2.6(D)mm  
 Opt. Temp. Range: -10°C +55°C  
 View Angle: 85/85/85/85 IPS (All)  
 RoHS Compliant  
 MIPI

# YLT080SHM31AA-B1-SX