


Backlight LED Circuit: 7串\*4并=28 Pcs

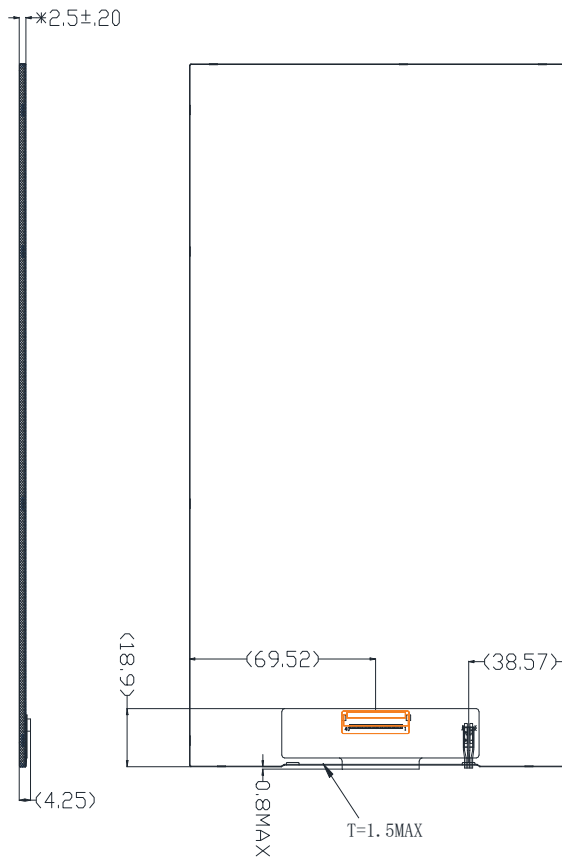

PIN NO	SYMBOL
1	NC
2	VDD
3	VDD
4	NC
5	RESET
6	NC
7	END
8	MPL_D2N
9	END
10	END
11	MPL_D1N
12	MPL_D1P
13	END
14	MPL_D0N
15	MPL_D0P
16	END
17	MPL_D0N
18	MPL_D0P
19	END
20	MPL_D3N
21	MPL_D3P
22	END
23	NC
24	NC
25	END
26	NC
27	NC
28	NC
29	NC
30	LED_
31	LED_
32	NC
33	NC
34	NC
35	NC
36	NC
37	NC
38	NC
39	LED+
40	LED+

10.1" TFT Display  
 260cd/m<sup>2</sup>  
 800xRGBx1280  
 143(W)228(H)2.5(D)mm  
 Opt. Temp. Range: -10°C +60°C  
 View Angle: 85/85/85/85 IPS (All)  
 RoHS Compliant  
 MIPI

# YLT101SHM40AB-B5-28LED