


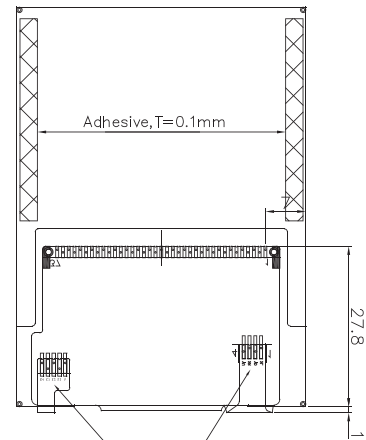
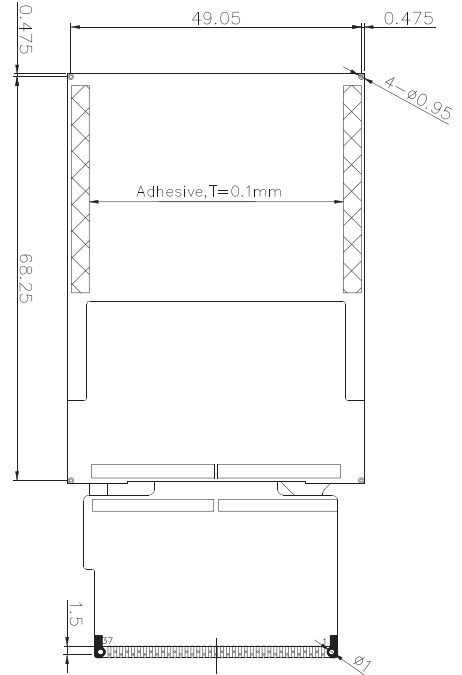


IM0	MCU-Interface Mode	DB Pin Use	
		Register/Content	GRAM
0	I80-system 16-bit interface	DB[7:0]	DB[15:0]
1	I80-system 8-bit interface	DB[15:8]	DB[15:8]

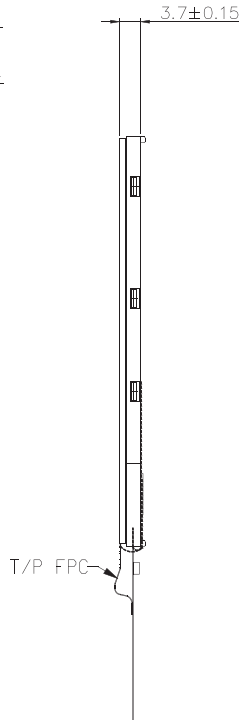

- IC : ILI9341
- TYPE : TFT
- DISPLAY MODE : T/M
- VIEWING DIRECTION : 12 O' CLOCK
- Backlight: 4 Chip parallel
- OPERATING TEMPERATURE: -20° C TO 70° C
STORAGE TEMPERATURE: -30° C TO 80° C
- GENERAL TOLERANCE : ±0.2

Cautions for Installing:

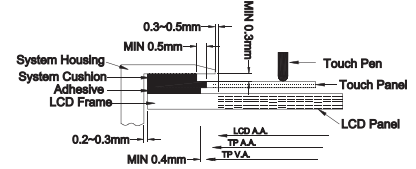

焊点: T=0.4mm(MAX)

FPC折叠参考图, FPC展开出货

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
DB0	DB1	DB2	DB3	GND	VCC	CS	RS	WR	RD	IMO	X+	Y+	X-	Y-	A	K1	K2	K3
20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	
K4	IM3	DB4	DB8	DB9	DB10	DB11	DB12	DB13	DB14	DB15	RST	VCC	VCC	GND	DB5	DB6	DB7	

P/N: YM280T-056DT

sales@yaoyulcd.com
www.yaoyulcd.com
0762-6686756

ISO9001 - CN17/30422
ISO14001 - CN17/30423
IATF16949 - CN17/30525