


PS3	PS2	PS1	PS0	MPUInterface	Mode	DB Pin in use
0	0	1	1	8080MPU8-bit	bus interface	DB[17: 10]
0	0	1	0	8080MPU16-bit	bus interface	DB[8: 1], DB[10: 17]
1	1	1	0	3-wire	SPI	CS, SDI, SCL
1	1	1	1	4-wire	SPI	CS, SDI, SCL, RS



1. Display type: 3.5" TFT-LCD
2. VDD TYPICAL: 3.3V
3. Viewing direction: 12'CLOCK
4. NUMBER OF DOTS: 320*(RGB)*240
5. Polarizer mode: Normally white
6. Operation temperature: -20°C~+70°C
7. Storage temperature: -30°C~+80°C
8. Driver/Controller IC: SSD2119
9. GENERAL TOLERANCE: ± 0.2
10. Products comply with "ROHS" standard
11. BLICKLIGHT 6 CHIP LEDS, WHITE; VF=19.2V
IF=15mA (3.5inch+RTP+SSD2119)

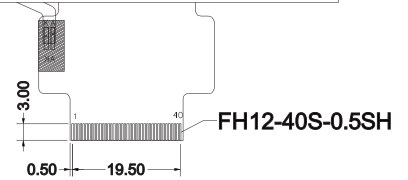

3.5" LCD, Resistive Touch
SSD2119 SPI/Parallel Interface

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
GND	CS	RS	RW	RD	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	DB8	DB9	DB10	DB11	DB12	DB13	DB14
21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
DB15	DB16	DB17	RST	SDI	SDO	SCL	PS0	PS1	PS2	PS3	WSYC	VCC	LEDA	LEDK	YU	XL	YD	XR	GND

P/N: YM350T-039AT

sales@yaoyulcd.com
www.yaoyulcd.com
0762-6686756

ISO9001 - CN17/30422
ISO14001 - CN17/30423
IATF16949 - CN17/30525