


↑
VIEWING DIRECTION

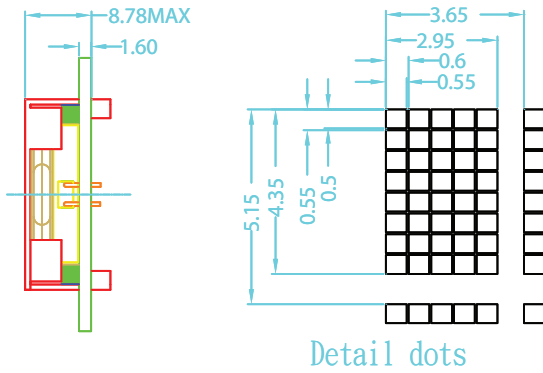

Pin assignment	
NO.	Symbol
1	VSS
2	VDD
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LEDA
16	LEDK

NOTES:

1. DISPLAY TYPE: STN/yellow-green
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: TRANSFLECTIVE/POSITIVE
4. OPERATING TEMP: -20°C~+70°C
5. STORAGE TEMP: -30°C~+80°C
6. LOGIC VOLTAGE: 5.0V
7. LCD OPT VOLTAGE: 4.5V
8. DRIVE METHOD: 1/16DUTY 1/5BIAS
9. DRIVER IC: ST7066U-0A(English-Japanese)
10. BACKLIGHT: LED(YELLOW-GREE,,4.2V,1-SIDES)

P/N: YMSC-C1602C

sales@yaoyulcd.com
www.yaoyulcd.com
0762-6686756

ISO9001 - CN17/30422
ISO14001 - CN17/30423
IATF16949 - CN17/30525